


Portable, lightweight, universal

RA01 folding ramps

- Simple use
- Anodized
- Lightweight
- Loading capacity of SWL 400 kg (881.68 lbs) for 500 mm wheelbase (19.68")
- Length up to 2740mm (107.87")
- 600mm, 800mm, 1000mm widths (23.62", 31.50", 39.37")
- Anti-slip surface

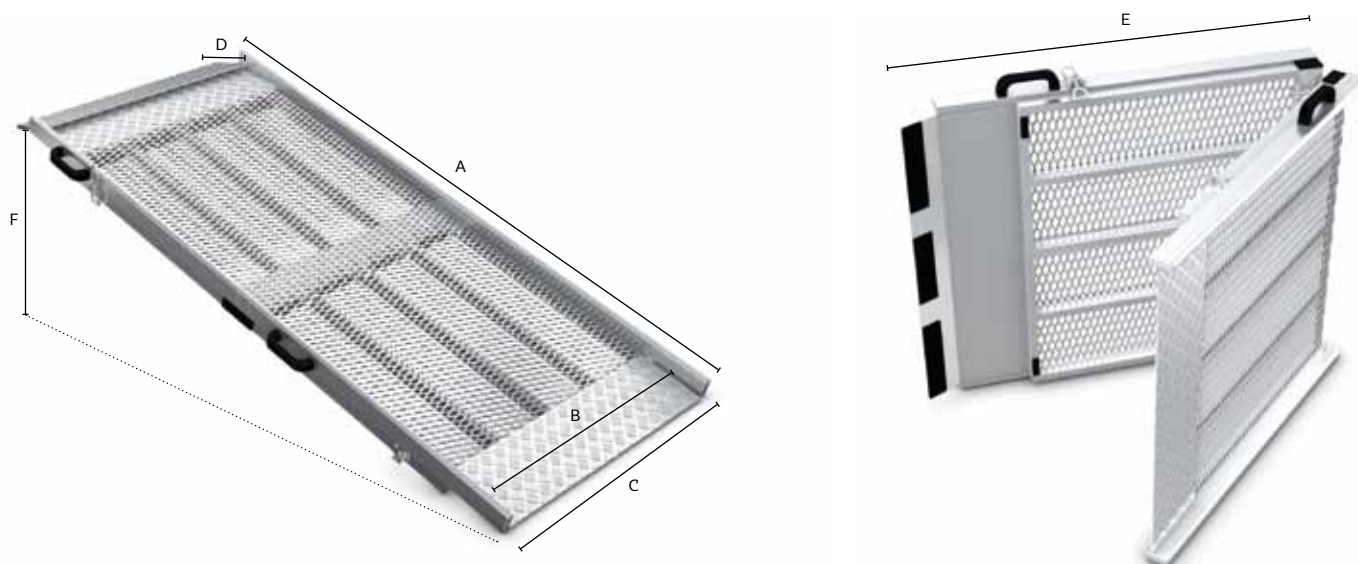

RA01 RAMPS

Code	Description
RA01-450x600	Folding and compact
RA01-405x800	Folding and compact
RA01-450x800	Folding and compact
RA01-550x800	Folding and compact
	Folding and compact

Technical specifications

Length A	Internal width B	External width C	Mounting depth D	Height folded E	Mounting height G min and max usable sloping angle *		Weight	
					kg	lbs		
2243 (88.31)	600 (23.62)	685 (26.97)	100 (3.94)	1180 (46.46)	380 (11°)	14.94 (11°)	21	(46.29)
					800 (22°)	31.50 (22°)		
2023 (79.65)	800 (31.50)	885 (34.84)	100 (3.94)	1070 (42.13)	350 (11°)	13.78 (11°)	21	(46.29)
					750 (23°)	29.53 (23°)		
2243 (88.31)	800 (31.50)	885 (34.84)	100 (3.94)	1180 (46.46)	380 (11°)	14.96 (11°)	23	(50.70)
					800 (22°)	31.50 (22°)		
2743 (107.99)	800 (31.50)	885 (34.84)	100 (3.94)	1430 (56.30)	470 (11°)	18.50 (11°)	28	(61.72)
					900 (20°)	35.43 (20°)		
2743 (107.99)	1000 (39.37)	1085 (42.72)	100 (3.94)	1430 (56.30)	470 (11°)	18.50 (11°)	32	(70.53)
					900 (20°)	35.43 (20°)		

* Foldable ramp can be installed in a wide range of vehicles. Contact one of our Design Centres for specific technical details.

